


FW™



Dust-laden air from the receiving hopper is directed into our chamber, where dust is captured on filter elements. Purified air is then released into the atmosphere, facilitated by an exhaust fan. Our self-cleaning regeneration system ensures sustained efficiency by returning accumulated dust to the product.

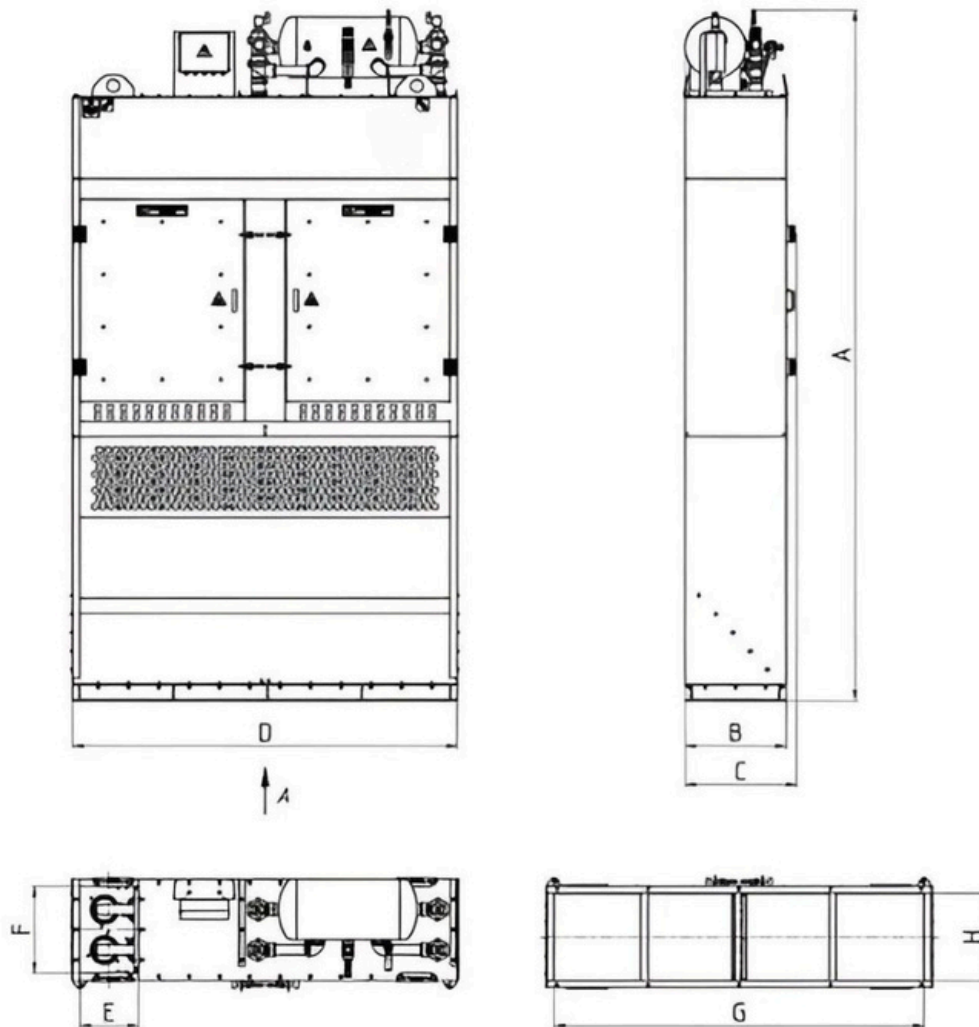

Model of the filter	Performance, m3/h	Filter area, m2	A	B	C	D	E	F	G	H	Weight without rotor, kg
SKIF- FW-20.20	4500-5500	18	3415	500	555	1900	290	430	1830	430	500
SKIF- FW-20.25	5500-7500	22	3915				350				550
Model of the filter	Performance, m3/h	Filter area, m2	A	B	C	D	E	F	G	H	Weight without rotor, kg
SKIF- FW-20.20 + SKIF- FW-20.20	10000	36	3415	500	555	3800	290	430	1830	430	1000
SKIF- FW-20.25 + SKIF- FW-20.25	12500	44	3915				350				1100